

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PATENT SPECIFICATION

(11) 1 529 247

1 529 247

- (21) Application No. 54278/77 (22) Filed 22 Apr. 1976
 (62) Divided out of No. 1529246
 (31) Convention Application No. 571303 (32) Filed 24 Apr. 1975 in
 (33) United States of America (US)
 (44) Complete Specification Published 18 Oct. 1978
 (51) INT. CL.² B60K 17/10
 (52) Index at Acceptance
 B7H C4A2B S2 S5A S6A V4A
 F2W 026 038 040 046 132 134 146 154 160 166 178 182
 184 228 250 252 274 280 296 316 320 366 368 376
 380 388 396 410 442 C3



(72) Inventors: James George Morrow, Sr.
 David James Pech
 Norman J. Kutz

(54) DRIVE MECHANISM FOR A DEMOUNTABLE SELF-PROPELLED CRANE TRANSPORT ASSEMBLY

(71) We, THE MANITOWOC COMPANY, INC., a corporation of the State of Wisconsin, United States of America, of 500 South 16th Street, Manitowoc, Wisconsin 54220, United States of America, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

10 This invention relates generally to a self propelled drive mechanism for a load handling vehicle.

15 The present Application is divided from Patent Application No. 16408/76 Serial No. 1529246 which relates to a demountable self-propelled transport assembly for a load handling vehicle comprising a central body portion, a pair of transverse beams connected respectively to the front and rear of said body portion and extending laterally from the sides thereof, said connection between said body portion and each of said beams including at least one hydraulically actuated lock pin selectively connected to a hydraulic supply means for selective actuation thereby, a pair of side frames each coupled to the projecting ends of said beams in load bearing relation on opposite sides of said body portion, means for detachably connecting said frames to said beams, a crawler assembly mounted on each of said side frames, jack means mounted on said transverse beams for selectively relieving the load imposed on said side frames by said beams, lateral adjusting means interconnecting said beams and frames for shifting said frames relative to said beams, and means for selectively energising said jacks and adjusting means to shift said side frames relative to said beams.

40 The present Application is concerned with the drive mechanism for the load handling

vehicle. Thus, according to the invention there is provided a self-propelled drive mechanism for a load handling vehicle having a central body portion, a pair of side frames and a crawler assembly mounted on each of the side frames, comprising hydraulic drive means for each crawler assembly including a drive sprocket around which a crawler track is trained, hydraulic pump means mounted on said body portion and detachably connected to said respective drive means for supplying hydraulic fluid thereto, said drive means each including two hydraulic motors coupled to said drive sprocket, one of said motors being a fixed displacement type, the other being a variable displacement type and both being connected in parallel to said pump means, control means for selectively reversing the flow of hydraulic fluid supplied by said pump means to said respective drive means to independently drive said tracks in forward and reverse directions as desired, and means for regulating the displacement of said variable displacement motor to effectively alter the combined driving torque and speed imparted by said motors to said sprocket.

The invention will now be described by way of example only with particular reference to the accompanying drawings wherein:—

Figure 1 is a fragmentary side elevation, somewhat schematic of a crane employing the invention;

Figure 2 is a plan view of the crane upper works with boom, masts, gantry and rigging removed;

Figure 3 is a fragmentary front elevation;

Figure 4 is a perspective view of the crane lower works with the ring gear and pivot post removed;

Figure 5 is an enlarged fragmentary section taken along line 5-5 in Figure 4;

45

50

55

60

65

70

75

80

Figure 6 is a fragmentary, exploded perspective of the central body portion and one of the disconnected transverse beams;

5 Figure 7 is a fragmentary, exploded plan view of the crane lower works shown in Figure 4;

Figure 8 is an enlarged fragmentary section taken along line 8-8 in Figure 7; and,

10 Figure 9 is a schematic diagram of the hydraulic drive system.

There is shown in Figure 1 a load handling device in the form of a crane assembly 10 with which the present invention is associated. The crane assembly 10 includes lower works 12 and upper works 13. As shown more clearly in Figures 4 and 7, the lower works 12 includes a central body 15 mounted between a pair of transverse beams 16, the ends of which are supported by a pair of traction assemblies 17. Each traction assembly includes side frames 18 which support a drive sprocket 19 and an idler sprocket 20 around which a crawler tread 21 runs.

The upper works 13 of the crane assembly 10 include a rotatable bed 14 supported by front and rear roller assemblies 22 and 23 which engage a ring gear and roller path 24 on the lower works 12. The upper works 13 carries a pivotally mounted boom 25 supported by two pairs of laterally spaced pendants 26 (only one pair of which is shown) extending rearwardly to the upper ends of laterally spaced masts 27 each of which carries an equalizer assembly 28 around which a boom hoist line 29 runs. Another equalizer assembly 30 is carried by the upper end of a pair of pivotally mounted gantry members 31 which are raised and held in position by a back hitch assembly in the form of a pair of hydraulic cylinders 32 (only one being shown). It will be seen that each of the boom hoist lines 29 forms a three-part line between the equalizer assemblies 28, 30 and the other end of each line is wound on one drum 33 of a dual drum boom hoist 34 at the rear end of the upper works 13.

To prevent overcentering of the boom 25 when it is raised, the upper works 13 carries automatic, cushioned boom stops 36. Both the boom 25 and the boom stops 36 may be removed from the upper works 13 when it is desired to move the crane 10 to another job site. In the illustrated embodiment the crane 10 is equipped with two lift lines 40 and 41. The front lift line 40 is wound on a drum 42 and extends over a sheave 43 on the rear side of the boom 25 and then makes a double reach between upper and lower equalizer assemblies 44, 45, respectively, carried by the boom and a main hook assembly 46. The rear lift line 41 is wound on another drum 47 and extends over another sheave 43 and then over an upper pulley assembly 48 mounted on the end of a boom extension 49. It will be also understood that the upper works carries a suitable power source, such as a diesel engine (not shown) and

appropriate variable control power transmission means for the major functions of the machine. The crane 10 is also provided with an operator's cab 50 within which the controls for the crane functions are located.

The lower works 12 is assembled in the form of a demountable self-propelled transport assembly which may be used as an independent load being vehicle when the upper works 13 and roller path 24 are removed, as shown in Figure 4. For driving the lower works 12, an engine 52 powers a pair of variable displacement, hydraulic pumps 53 through an enclosed gear train and transmission case 54 mounted on an engine bed 55 detachably secured to one of the cross beams 16.

As shown in Figure 9, the pumps 53 each have a low pressure supply section 56 which draws hydraulic fluid as needed from a reservoir 57 and a variable displacement discharge section 58 coupled by detachable conduits 60 and 61 in closed parallel circuit with a pair of hydraulic motors 62 and 63 mounted on each of the traction assemblies 17. Each pump 53 is also provided with a double acting pneumatic control actuator 64 whereby the pump displacement and supply discharge direction through the conduits 60, 61 may be selectively regulated. By manipulation of operator levers 65 coupled to valves 66 the actuators are selectively controlled causing the pumps 53 to supply hydraulic fluid in alternate forward and reverse directions to the hydraulic motors 62 and 63 mounted adjacent the rear end of each of the side frames 18.

Referring to Figure 5, it will be seen that the motors 62, 63 are mounted with their drive gears 67, 68 on opposite sides of and in mesh with a gear 69 on a shaft 70, the opposite end of which carries an inboard brake drum 71 engageable by a brake band 72 upon actuation of a lever 73. The shaft 70 carries another gear 74 in mesh with a gear 75 on an intermediate shaft 76 which in turn carries a gear 77 in mesh with the final drive gear 78 secured to the drive sprocket 19 and journaled on a shaft 79 on which the sprocket 19 is also journaled.

One of the drive motors 62 is a fixed displacement type and the other motor 63 is a variable displacement type having a regulating means 81 therefore. This combination permits a wide range of control over the combined speed and torque imparted by the motors 62 and 63 to the drive sprocket 19. For example, the motor 63 may be of an adjustable swash plate type having a null position at which the motor displacement is zero and having a range of positive and negative displacement positions which reverse the flow direction through the motor. When the swash plate is in the null position, all of the output of the pump 53 is directed to the fixed displacement motor 62. By moving the swash plate into the range of positive displacement positions, the output of the pump 53 is split between the motors 62, 63

70

75

80

85

90

95

100

105

110

115

120

125

130

reducing the driving speed and increasing the torque imparted to the sprocket 19. Conversely, when the swash plate is moved into the range of negative displacement positions, the motor 63 is effectively transformed into a booster pump drawing fluid from the discharge side of the fixed displacement motor 62 and increasing the pressure of the hydraulic fluid for readmission into the input side of the motor 62. This, of course, progressively increases the speed of motor 62, but decreases the torque imparted to the sprocket because the variable displacement motor 63 is now being driven by the fixed displacement motor 62.

The regulating means 81 includes a spring biased compensating actuator having a feedback section 82 connected to the motor supply/discharge lines 60, 61 by a line 83 and a shuttle valve 84. Pressure from the higher pressure one of lines 60, 61 is thus delivered to the feedback section 82 of the regulating means 81. The compensating actuator of the regulating means 81 also includes a pneumatic pressure section 85 opposing the spring bias and the pressure in the hydraulic feedback section 82. The compensating actuator is preferably of the differential pressure type wherein one psi of air pressure in section 85 balances forty psi of hydraulic pressure in section 82, for example.

The regulating means 81 maintains the variable displacement motor 63 in full positive displacement until the control levers 63 are moved to place the pumps 53 in substantially full output in either the forward or reverse directions. The pneumatic section 85 of the regulating actuator 81 is energized by pneumatic pressure from a source such as an engine driven pump 86. The pressure output of the pump 86 is regulated by an adjustable regulator 87, which may be set for example at 80 psi. Between the adjustable regulator 87 and the pneumatic section 85 of the compensating actuator 81 is a normally closed poppet valve 88 having an operator 89 biased against a T-shaped lever 90 connected to the actuator 64 for controlling the pump 53.

When the lever 90 is moved by an actuator 64 to place the pump 53 in substantially full output in either the forward or reverse direction, the operator 89 is released and the poppet valve 88 is opened sending air under pressure from the regulator 87 to the pressure section 85 of the actuator 81. This pressure opposes the spring bias and the feedback pressure in section 82 and urges the variable displacement pump 63 toward negative displacement. If the feedback pressure is low, for example below 3000 psi, the variable displacement pump goes to full negative displacement, in effect becoming a pump supplying additional hydraulic fluid to the fixed displacement motor 62 and thus increasing the driving speed. When the feedback pressure increases, for example above 3000 psi, such as when the driving torque demand

increases, the hydraulic pressure in the feedback section 82 and the initial spring bias operate against the pneumatic pressure in the pressure section 85 to shift the compensating actuator progressively away from the full negative displacement position. This automatically increases the combined torque supplied until a balanced condition is reached within the range of about 3000-3300 psi feedback pressure, for example.

The lower works 12 may be quickly disassembled to facilitate shipment on another form of carrier such as, for example, a truck bed or rail car. To this end, the crawler tracks 21 may be removed from each of the crawler assemblies 17, the side frames 18 are detachably connected to the transverse beams 16 and the beams 16 are, in turn, detachably connected to the front and rear of the central body portion 15 of the lower works 12.

As shown in Figures 4, 6 and 7, the central body portion 15 is in the form of a rigid box section having a pair of laterally spaced vertical flanges 91, 92 projecting longitudinally adjacent each corner. Each of the flanges 91, 92 have upwardly facing crescent-shaped hook openings 93 adjacent their upper ends and circular openings 94 adjacent their lower ends. A hydraulic cylinder 95 with a laterally extendable lock pin 96 is secured to the central body portion 15 in alignment with and in close proximity to the lower openings 94 in each pair of flanges 91, 92. The transverse beams 16 each have a pair of vertical webs 97 on their inner face spaced so that each web 97 fits between a pair of flanges 91, 92. The webs 97 have circular openings 98 adjacent their lower ends for receiving the lock pins 96 and carry hook pins 99 at their upper ends receivable in the crescent-shaped hook openings 93. In the preferred embodiment, the transverse beams are provided with additional webs 101 which straddle each pair of flanges 91, 92 and which have openings 102 to receive the lock pins 96. Also, in their retracted positions, the lock pins 96 are stored in sleeves 103 secured to the central body portion 15.

From the foregoing, it will be appreciated that the transverse beams 16 may be quickly demounted from the central body portion 15 by energizing the cylinders 95 with hydraulic fluid (for example from one of the pumps 53) to retract the lock pins 96 into the sleeves 103. The beams 16 may then be lifted withdrawing the hook pins 99 vertically out of the crescent-shaped openings 93.

In the illustrated embodiment the ends of each of the transverse beams 16 are of substantially rectangular cross-section and the side frames 18 are provided with complementary openings 105 to receive the ends of the beams in load bearing relation. The beams 16 are also provided with pairs of vertically spaced horizontal plates 106, 107 projecting longitudinally from the outer faces thereof. Each

70

75

80

85

90

95

100

105

110

115

120

125

130

5 pair of plates 106, 107 has vertically aligned
apertures 108, 109 therein and the side frames
18 each have a pair of inwardly projecting
transverse mounting brackets 110 spaced to fit
between respective pairs of the plates 106, 107
at the front and back of the central body
portion 15. A mounting pin 111 is dimensioned
to fit into the apertures 108, 109 and an
opening 112 in the bracket 110. To facilitate
insertion and withdrawal, each pin 111 is
carried on a turnbuckle or ratchet jack
assembly 113 selectively mounted on the beam
16 above either one of the apertures 108, 109.
It will be understood that when the brackets
110 are pinned in the outboard apertures 109
the overall track width of the lower works 12 is
greater (as shown in solid lines in Figure 3) than
when the brackets are pinned in the inboard
apertures 103.

20 Because the crane 10 of the present
invention is quite large it must be disassembled
for shipment and transport from one job site to
another. In Figure 4, the lower works 12 are
shown after the upper works 13 and roller path
24 are removed. As shown in Figure 7, the main
components of the lower works 12 may also be
quickly and conveniently disassembled. To this
end, hydraulic jack means 115 are mounted on
the beams 16 and hydraulic cylinders 116 are
mounted within the beams and interconnect
the beams 16 and the side frames 18.

35 To change the tread width of the track
assemblies 17 or to remove the track assemblies
from the lower works 13, the hydraulic jacks
115 are energized to take the load of the beams
16 off the side frames 18. The pins 111 can
then be withdrawn by operating the turnbuckle
or ratchet jack assemblies 112. Then by
energizing the cylinders 116 the track
assemblies can be moved laterally on the beams
to a different position or pushed entirely off.
Once the ends of the cylinders 116 are
unpinned from the mounting brackets 117 on
the side frames the track assemblies are free to
be moved away to another location.

45 After the track assemblies are removed it is
desirable to operate the jacks 115 sufficient to
place the central car body 15 in contact with
the ground or some supporting blocking
material. The jacks can then be manipulated to
just take the weight of the beams 16 off the car
body 15 and the pins 96 can be withdrawn into
their sleeves 103 by the cylinders 95. An
auxiliary lift mechanism (not shown) may be
utilized to prevent tilting of the beams, and
lifting eyes 116 are provided for this purpose.
Further operation of the jacks 115 raises the
beams 16 relative to the car body 15 and lifts
the hook pins 99 out of the crescent-shaped
hook openings 93. The detached beam 16 is
then free to be moved away to another site.

60 It may also be seen upon reference to Figure
7, that the maximum cross-sectional width of
the transverse beams 16, side frames 18
(including their mounting brackets 110) and
65

crawler tracks 21 are each less than the width
of the central body portion 15. Thus, when the
tracks 21, side frames 18 and transverse beams
16 are detached from one another and from the
body portion 15, the detached components
may be arranged for shipment on a carrier such
as a truck bed, just wide enough to accom-
modate the central body portion 15. In this
way the demounted lower works 12 may be
conveniently shipped from one job site to
another.

WHAT WE CLAIM IS:—

1. A self-propelled drive mechanism for a
load handling vehicle having a central body
portion, a pair of side frames and a crawler
assembly mounted on each of the side frames,
comprising hydraulic drive means for each
crawler assembly including a drive sprocket
around which a crawler track is trained,
hydraulic pump means mounted on said body
portion and detachably connected to said
respective drive means for supplying hydraulic
fluid thereto, said drive means each including
two hydraulic motors coupled to said drive
sprocket, one of said motors being a fixed
displacement type, the other being a variable
displacement type and both being connected in
parallel to said pump means, control means for
selectively reversing the flow of hydraulic fluid
supplied by said pump means to said respective
drive means to independently drive said tracks
in forward and reverse directions as desired, and
means for regulating the displacement of said
variable displacement motor to effectively alter
the combined driving torque and speed
imparted by said motors to said sprocket.

2. A drive mechanism as claimed in claim 1
wherein said regulating means includes a
compensating actuator for maintaining said
variable displacement motor in full positive
displacement until said control means is
operated to place said pump means in sub-
stantially full output in either said forward or
reverse direction.

3. A drive mechanism as claimed in claim 2
wherein said actuator includes a hydraulic
feedback section coupled to the supply/
discharge lines of said variable displacement
motor.

4. A drive mechanism as claimed in claim 3
wherein said actuator includes a pressure
section opposing said feedback section, said
pressure section being energized for urging said
variable displacement pump toward negative
displacement when said control means is moved
to substantially full output position in either
said forward or reverse direction.

5. A drive mechanism as claimed in claim 4
wherein said actuator is energized by pneumatic
pressure from a source controlled by said
control means and said source includes a
pressure regulator for adjusting the pneumatic
pressure admitted to said pressure section in
opposition to the feedback pressure in said
feedback section up to a predetermined level.

6. A self-propelled drive mechanism for a load handling vehicle and substantially as hereinbefore described and as shown in the accompanying drawings.

5

F.J. CLEVELAND & COMPANY,
Chartered Patent Agents,
40-43, Chancery Lane,
London, W.C.2.
For the Applicants.

Printed for Her Majesty's Stationery Office, by Croydon Printing Company Limited, Croydon, Surrey, 1978.
Published by The Patent Office, 25 Southampton Buildings, London, WC2A 1AY, from
which copies may be obtained.

FIG.1





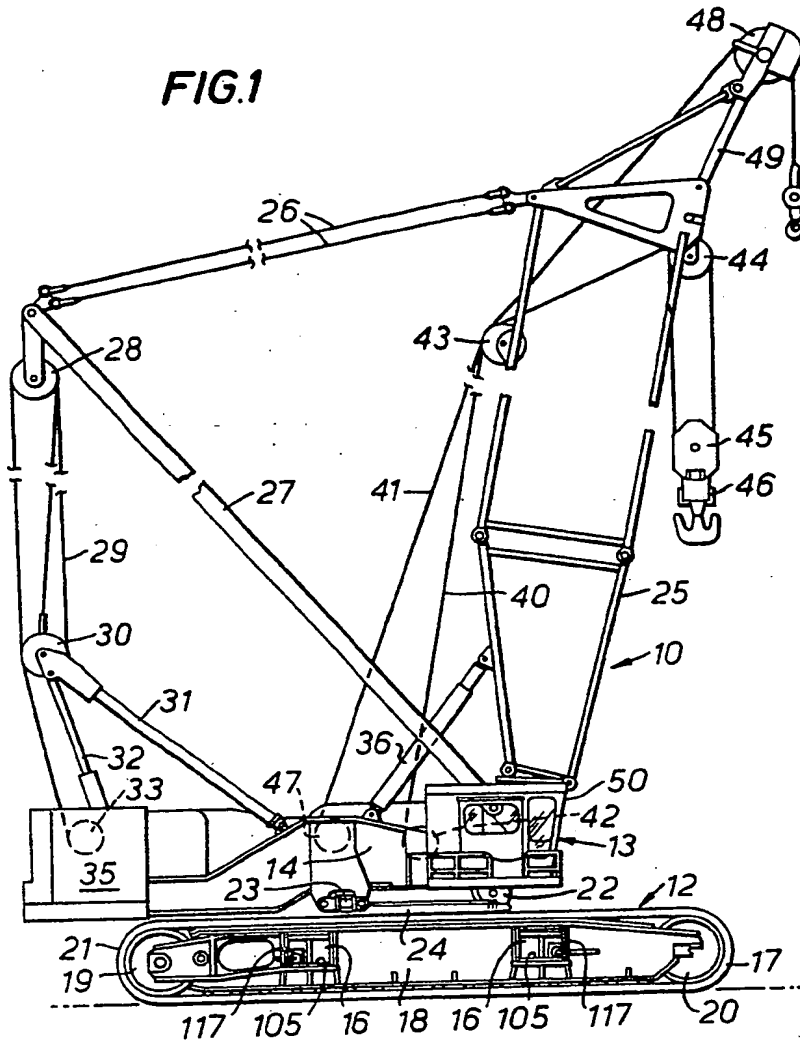


FIG. 2**FIG. 8****FIG. 3**

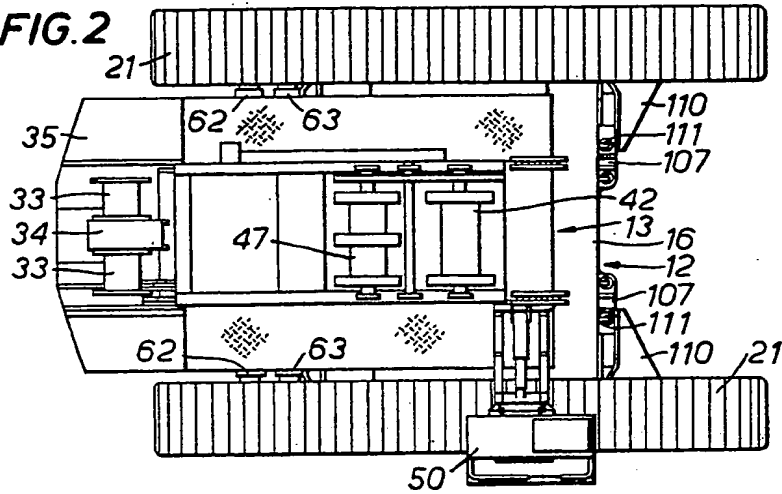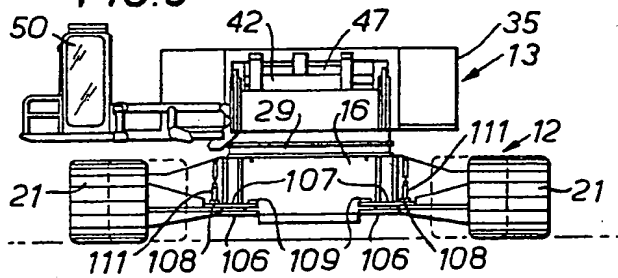

1529247

COMPLETE SPECIFICATION

5 SHEETS

This drawing is a reproduction of
the Original on a reduced scale
Sheet 4

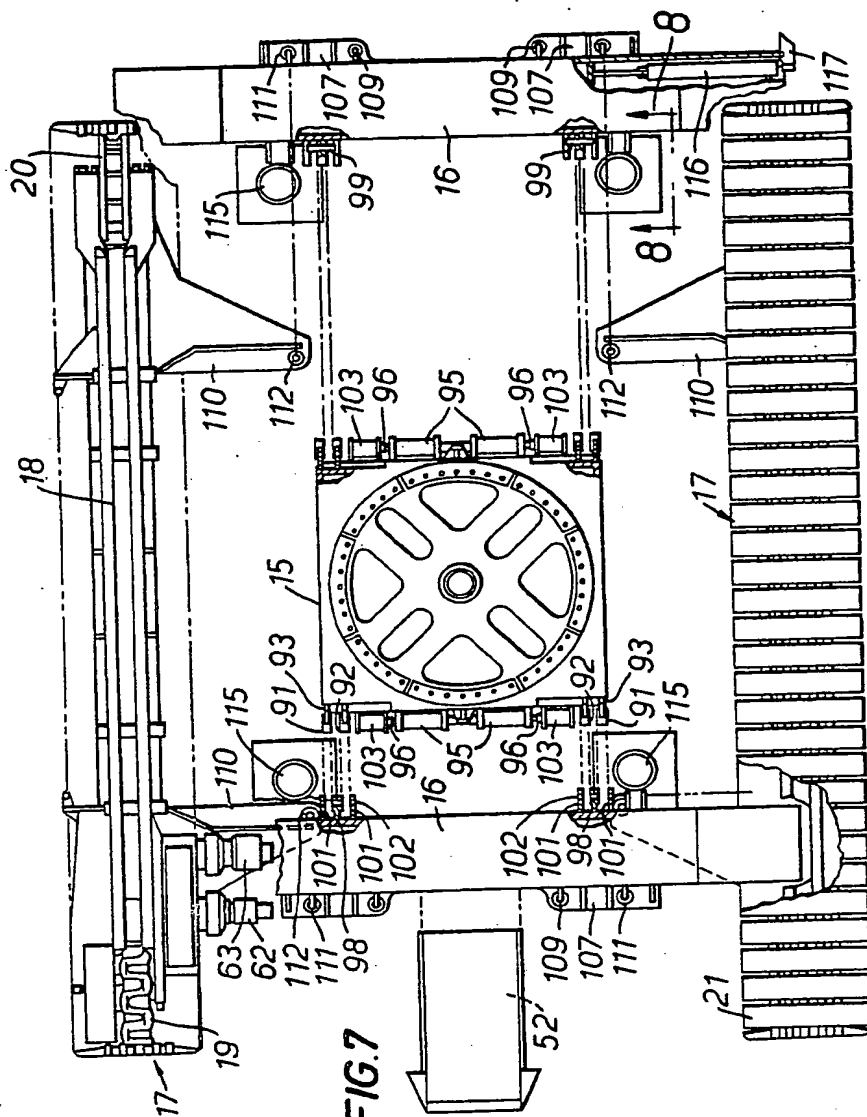
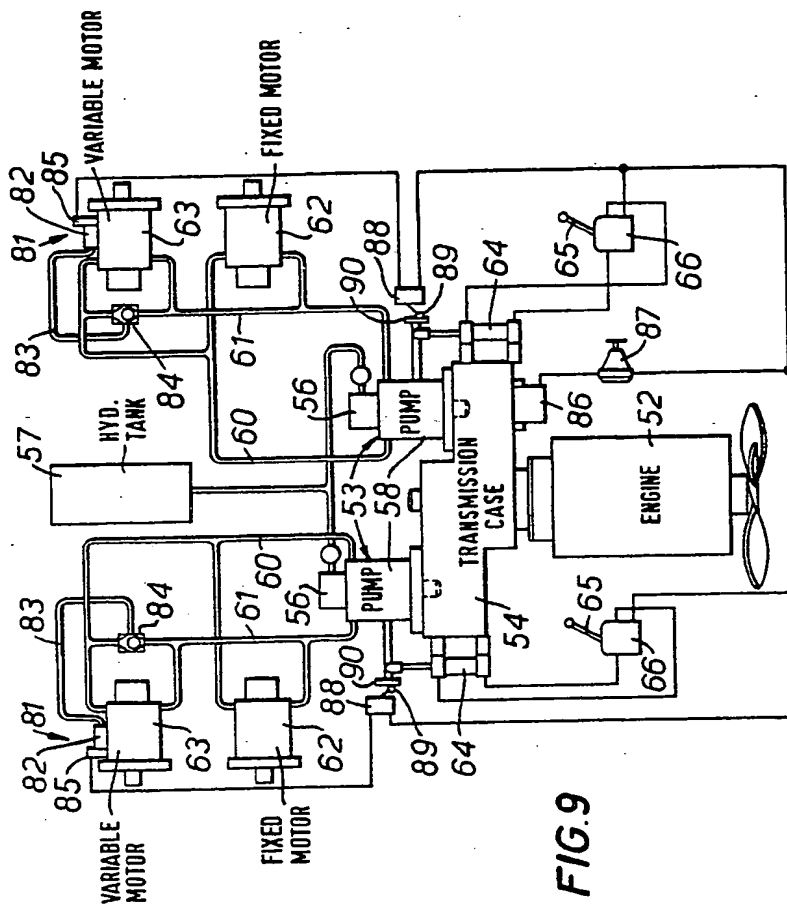


FIG. 7

**FIG. 9**